


Ordering Information

Ø (mm)	Length (mm)		
	10	15	20
1.75	617-104-1	617-154-1	617-204-1
2.00	620-104-1	620-154-1	620-204-1
2.25	622-104-1	622-154-1	622-204-1
2.50	625-104-1	625-154-1	625-204-1
2.75	627-104-1	627-154-1	627-204-1
3.00	630-104-1	630-154-1	630-204-1
3.50	635-104-1	635-154-1	635-204-1
4.00	640-104-1	640-154-1	640-204-1

Technical Specifications

Scoreflex NC	
Catheter Type	Rapid exchange
Guidewire Lumen Diameter	0.014"
Balloon Material	Nylon blend
Balloon Compliance	Non-compliant
Coating (distal shaft and tip)	Hydro-X hydrophilic coating
Coating (guidewire lumen)	Invio hydrophobic coating
Crossing Profile*	0.0313" / 0.79 mm
Nominal Pressure	12 atm
Rated Burst Pressure	20 atm

* (2.5 mm diameter balloon)

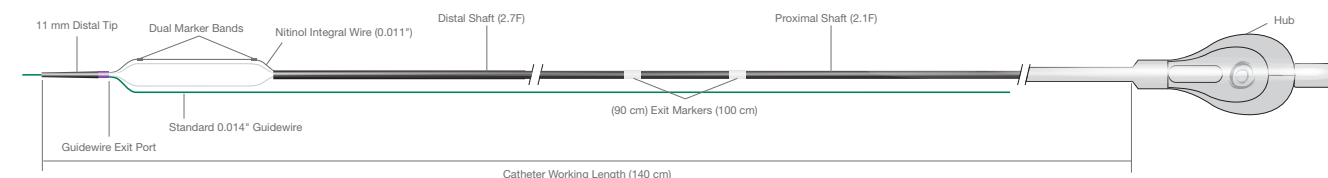

For more information please visit our website at www.OrbusNeich.com or contact us:

EMEA HEADQUARTERS

Drs. W. van Royenstraat 5
3871 AN Hoevelaken
The Netherlands

Phone +31.33.254.1150
Fax +31.33.254.1151

Toll Free Phone 00800.0254.1150*
Toll Free Fax 00800.0254.1151*

* Only for Belgium, Denmark, France, Germany, Ireland, Netherlands, Norway, Sweden and UK

© 2016 OrbusNeich. All rights reserved. **Not available for sale in the USA.**

G-70-0598 Rev01


Scoreflex is a TradeMark of OrbusNeich. All data and photos on file.
Illustrations are not to be considered as engineering drawings or photos.



Focused Force Angioplasty for
Non-compliant Lesion Preparation

Focused Force Angioplasty for **Safe and Controlled Dilatation**

Scoreflex NC is a focused force dilatation balloon with a dual-wire system which creates a focal stress pattern to facilitate safe and controlled plaque modification at lower resolution pressure

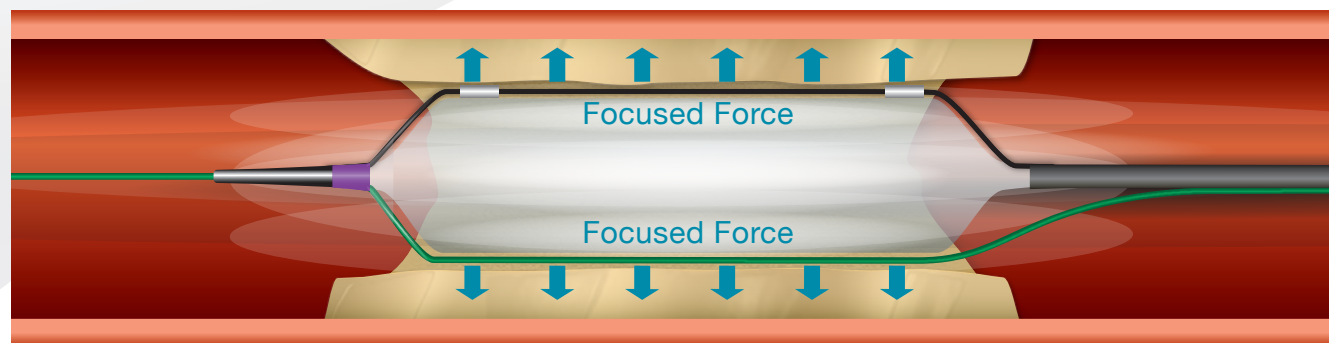

Scoreflex NC **Recommended Applications**

Coronary Applications

- Lesion preparation for stents, scaffolds, drug-coated balloons
- Calcified and fibrotic lesions
- Ostial lesions
- Bifurcation lesions
- Long diffused lesions
- Small lesions without need of stenting
- In-stent restenosis



Unique Catheter Design for **Dual-Wire Scoring**

Short rapid exchange tip facilitates the combined effect of the built-in nitinol integral wire and the conventional guidewire to score lesions

Non-Compliant Balloon for **Safety and Accuracy**

Proprietary nylon formulation gives the balloon controlled balloon growth and high rated burst pressure

Catheter Designed for **Excellent Deliverability**

Lowest crossing profile in its class* and continuous hub-to-tip metal construction for optimal pushability

Lubricious Coating for **Minimal Friction**

Hydrophilic coating on tip and distal shaft and hydrophobic coating in the guidewire lumen provide smooth trackability

*Data on file